

NU 227 *XSafe*

Scotsman®
Ice Systems

Self Contained Ice Machine 105 kg

Item #:

Project:

Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 227
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 227
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 227
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

INTERNAL BIN CAPACITY

37 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com


Self Contained Ice Machine 105 kg

10 December 2020

NU 220 XSafe

Self Contained Ice Machine 105 kg

Item #:
Project:
Quantity:

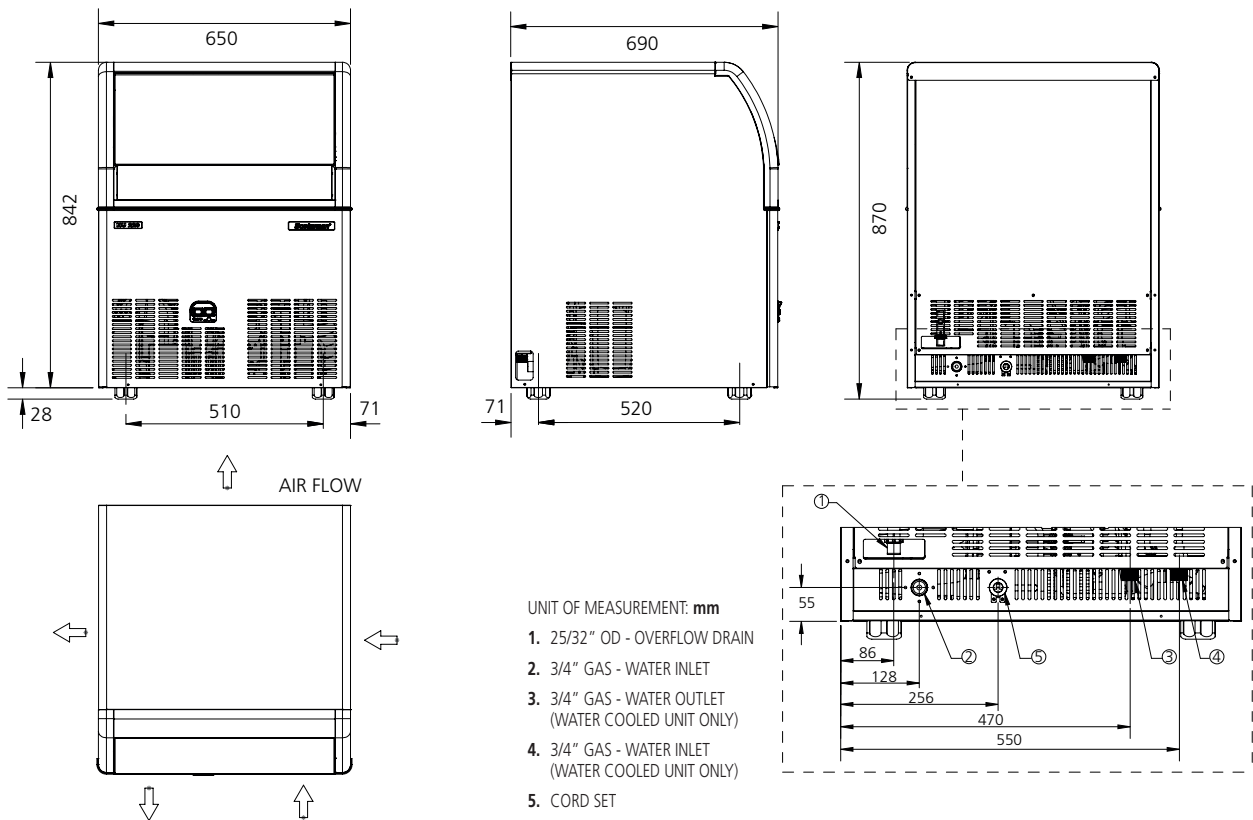

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		650 x 690 x 870 mm		Carton (W x D x H)		730 x 770 x 1015 mm					
Net weight		63 kg		Weight		77.5 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NU 227 AS	230/50/1	105	95	68	15.4	10.5	5.5	480	670	3 x 1.5	10
NUH 227 AS	230/50/1	104	95	71	15.1	10.7	7.5	480	670	3 x 1.5	10
NUL 227 AS	230/50/1	105	93	68	15.4	10.5	7.1	480	670	3 x 1.5	10