

SCW 14 FP EVO

Scotsman
Ice Systems

Water Cooler

Item #:


Project:

Quantity:



FEATURES

- Refrigerated drinking water fountain, USPH-S Regulations Compliant.
- Includes foot pedal activated projector.
- Water thermostat positioned behind the front panel for ease of reach.
- Delivers 50 liters per hour (13.2 gph) of 8°-12°C (46°-53°F) water (at 32°C-90°F ambient and 21°C-70°F inlet water temperatures).
- Cabinet and base finish, as well as all interior metal parts, in Stainless Steel.
- Easily removable front panel for routine maintenance & technical service access purposes.
- "Pierce Yourself" style incoming/outgoing utilities passages and internal connection turrets allow for maximum installation flexibility.
- High-efficiency water cooling tank and coil.



Stainless Steel
Back Panel
(standard)

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Water Cooler

23 July 2018


SCW 14 FP EVO

Water Cooler

Item #:

Project:

Quantity:

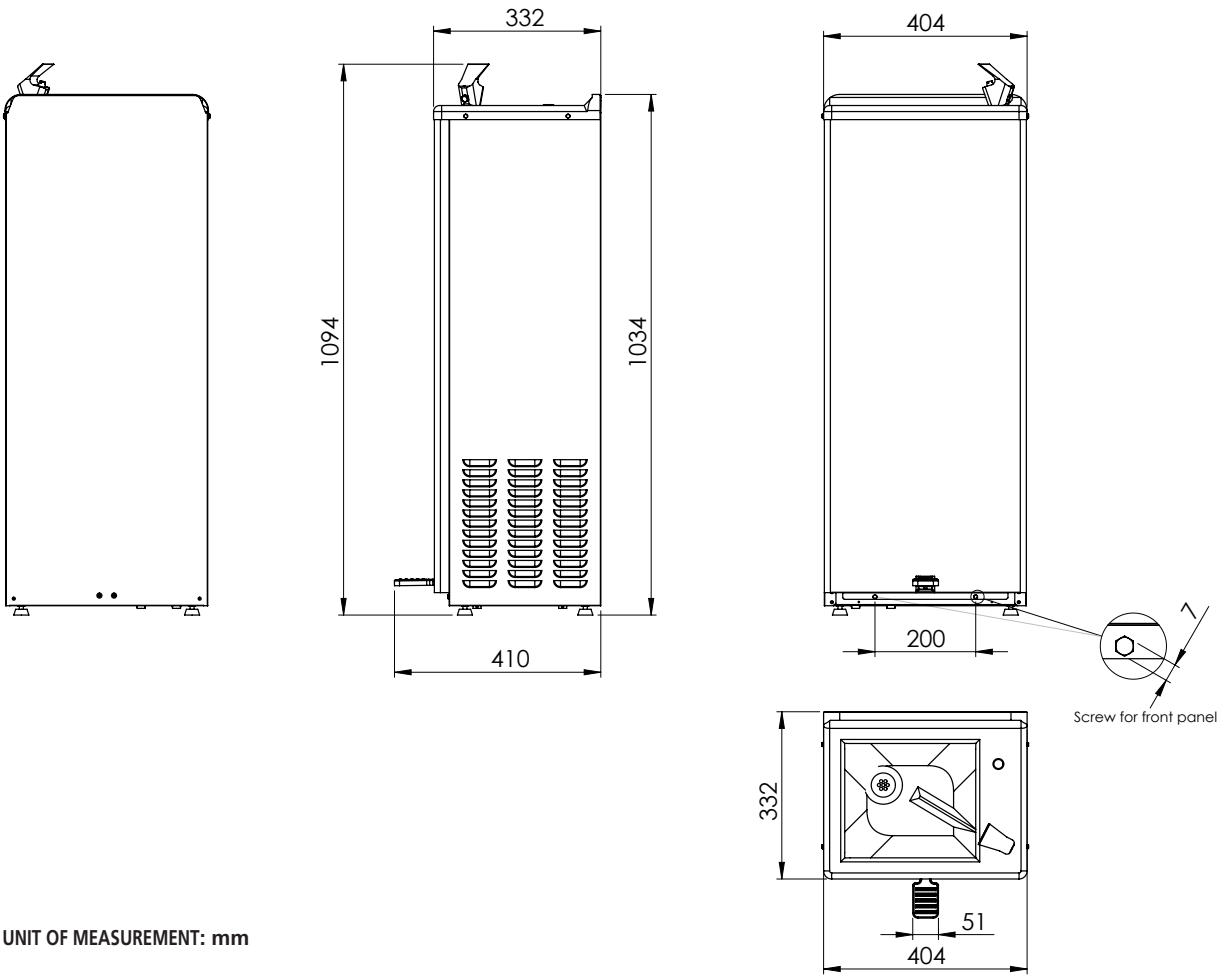

UNIT DATA

Size (W x D x H) 404 x 332 x 1275 mm
Net weight 33 kg

SHIPPING DATA

Carton (W x D x H) 440 x 400 x 1150 mm
Weight 36 kg

		Compressor		Circuit wires		Max. fuse size
Version	Voltage	Btu/h	W	No.	Ømm²	A
SCW 14 FP EVO AS	230/50/1	853	250	3	1.0	10
SCW 14 FP EVO AS	230/60/1	853	250	3	1.0	10