

SW 12 USPH

Scotsman
Ice Systems

Water Cooler

Item #:


Project:

Quantity:



FEATURES

- Refrigerated drinking water fountain, USPH-S Regulations Compliant.
- Includes front push-pad to activate the flow of water.
- Delivers 50 liters per hour of 8°-12°C water (at 32°C ambient and 21°C inlet water temperatures).
- Cabinet and base finish, as well as all interior metal parts, in Stainless Steel.
- Easily removable front panel for routine maintenance & technical service access purposes.
- "Pierce Yourself" style incoming/outgoing utilities passages and internal connection turrets allow for maximum installation flexibility.
- Heavy-gauge stainless steel frame simplifies wall-mount installation.
- High-efficiency water cooling tank and coil.
- Options: AISI 316 stainless steel finishing.



CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1
230/60/1

115/60/1 upon request

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Water Cooler

July 2022


SW 12 USPH

Water Cooler

Item #:

Project:

Quantity:

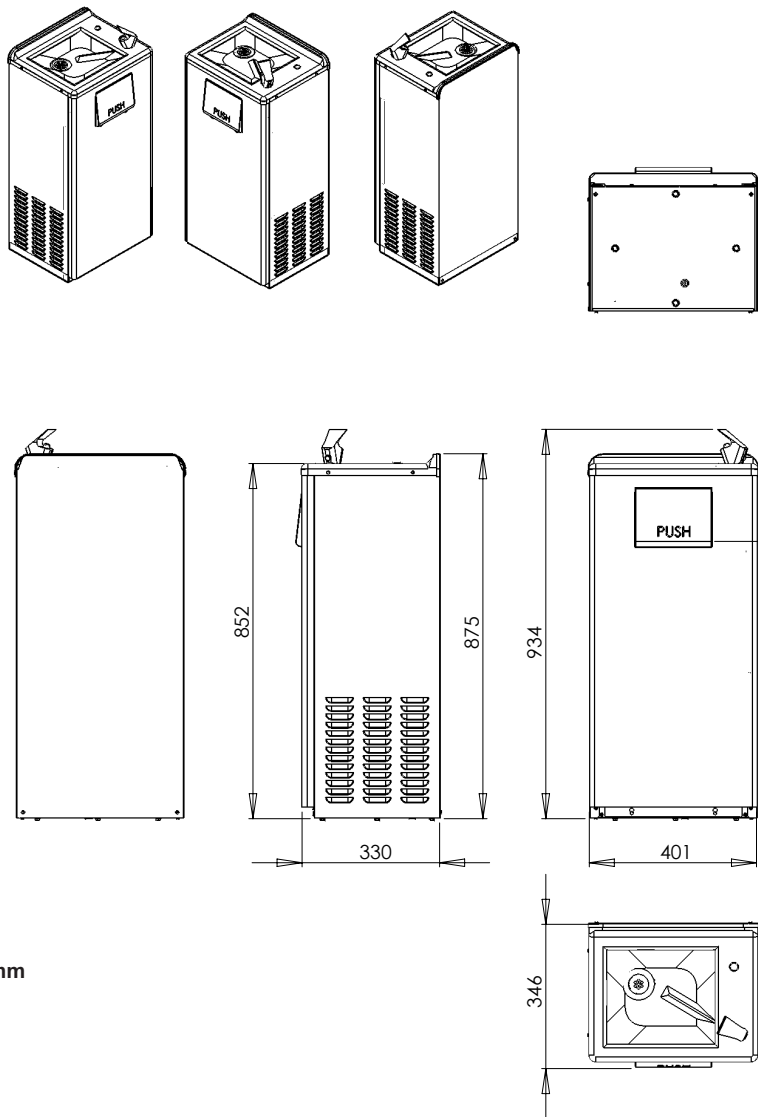

UNIT OF MEASUREMENT: mm

UNIT DATA

Size (W x D x H) 401 x 330 x 934 mm
Net weight 33 kg

SHIPPING DATA

Carton (W x D x H) 480 x 430 x 1040 mm
Weight 36 kg

		Compressor		Circuit wires		Max. fuse size
Version	Voltage	Btu/h	W	No.	Ømm²	A
SW 12 USPH AS	230/50/1	1204	353	3	1.0	10
SW 12 USPH AS	230/60/1	1204	353	3	1.0	10