

AC 87

EcoX

Self Contained Ice Machine 44 kg

Scotsman®

Ice Systems

Item
Project
Quantity



- FEATURES
- Produces individual Gourmet crystal clear ice cubes.
 - Resistant stainless steel exterior.
 - Advanced diagnostics computerized controls.
 - Front panel in & out airflow (air-cooled model only) for built-in installation.
 - Front access condenser air filter, removable and washable (air cooled version only).
 - Routine maintenance visible alarm light on front panel.
 - Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.



AC L

Large Gourmet 39 g

Ø 38 mm - H 41 mm



AC M

Medium Gourmet 20 g

Ø 30 mm - H 34 mm



AC S

Small Gourmet 8 g

Ø 21 mm - H 25 mm

CONDENSING
SYSTEM

air cooled

water cooled

REFRIGERANT GAS

R290

VOLTAGE
V/HZ/PH

230\50\1

Model	Cube	Ø	H	Weight
AC L	Large	38 mm	41 mm	39 g
AC M	Medium	30 mm	34 mm	20 g
AC S	Small	21 mm	25 mm	8 g

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it

www.scotsman-ice.com

Self Contained Ice Machine 44 kg


AC 87 EcoX

Self Contained Ice Machine 44 kg

Scotsman
Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 44 kg

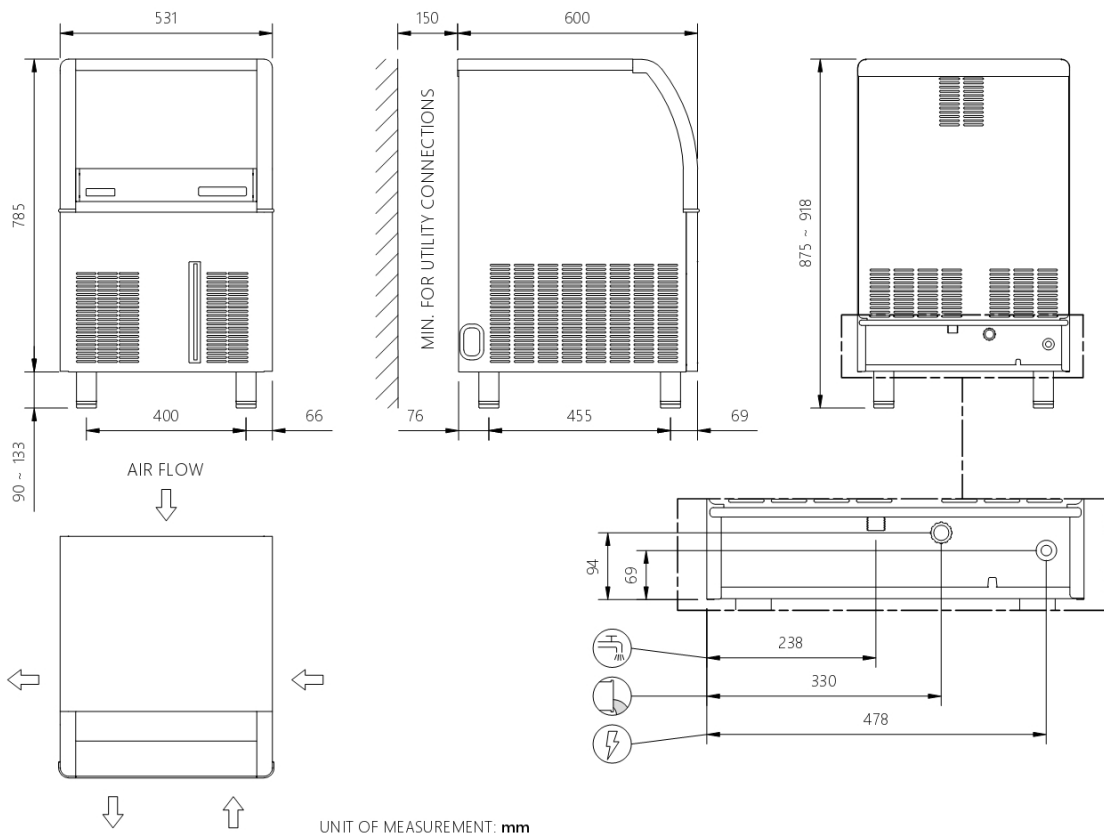

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions							
Size (W x D x H)			Size (W x D x H)										
531 x 600 x 785 mm			600 x 670 x 890 mm										
Net weight			Gross weight										
44 kg			55kg										
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size	
Version	Voltage	Condensation	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A	
ACM 87 AS	230\50\1	A	44	43	35	19	0,9	9	3	570	3 x 1,5	10	
ACM 87 WS	230\50\1	W	43	41	36	19	1,0	9	32	415	3 x 1,5	10	
ACS 87 AS	230\50\1	A	40	39	31	19	0,9	11	5	580	3 x 1,5	10	
ACL 87 WS	230\50\1	W	38	37	34	0	1,0	9	33	420	3 x 1,5	10	
ACL 87 AS	230\50\1	A	36	35	31	19	0,9	10	3	550	3 x 1,5	10	

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg