

EC 107

XSafe Eco

Self Contained Ice Machine 54 kg

Item
Project
Quantity

					FEATURES • Produces individual Gourmet crystal clear ice cubes. • Resistant stainless steel exterior. • Advanced diagnostics computerized controls. • Front panel in & out airflow (air-cooled model only) for built-in installation. • Front access condenser air filter, removable and washable (air cooled version only). • Routine maintenance visible alarm light on front panel. • Ergonomically designed ice storage access, with disappearing door. Door closing movement dampening system.		
 EC L Large Gourmet 39 g Ø 38 mm - H 41 mm  EC M Medium Gourmet 20 g Ø 30 mm - H 34 mm					CONDENSING SYSTEM water cooled air cooled		
					REFRIGERANT GAS R290		
					VOLTAGE V/HZ/PH 230\50\1		
Model	Cube	Ø	H	Weight			
EC L	Large	38 mm	41 mm	39 g			
EC M	Medium	30 mm	34 mm	20 g			
CERTIFICATIONS 					OPERATING REQUIREMENTS		
						Minimum	Maximum
Air temperature						10	43
Water temperature						5	38
Water pressure						1 bar (14 psi)	5 bar (70 psi)
Electrical voltage						-10%	+10%
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.					www.scotsman-ice.it www.scotsman-ice.com		

EC 107

XSafe Eco


Self Contained Ice Machine 54 kg

Scotsman®

Ice Systems

Item
Project
Quantity

Self Contained Ice Machine 54 kg

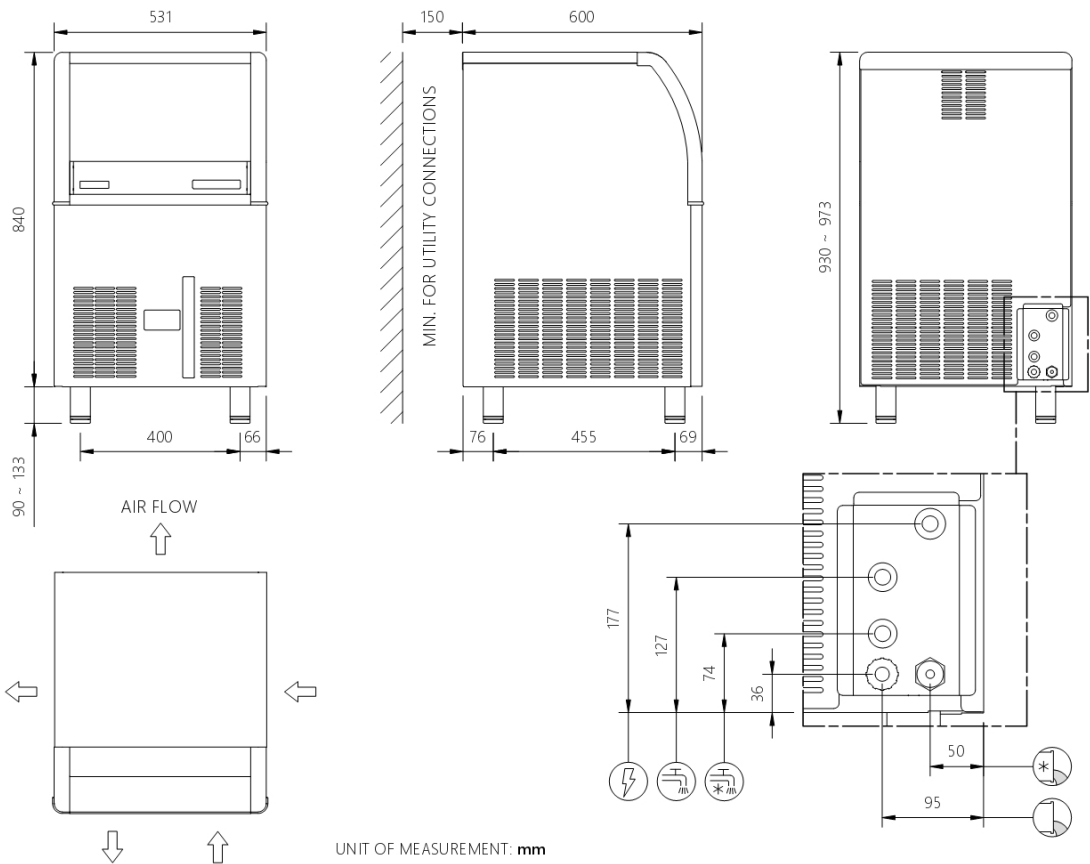

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)			Size (W x D x H)									
Net weight			Gross weight									
531 x 600 x 840 mm			600 x 670 x 950 mm									
49 kg			56kg									
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/ 24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
ECM 107 WS	230\50\1	W	54	53	48	23	1,0	9	57	485	3 x 1,5	10
ECM 107 AS	230\50\1	A	53	51	43	23	1,0	11	5	580	3 x 0,0	10
ECL 107 WS	230\50\1	W	49	47	41	23	1,0	9	36	505	3 x 1,5	10
ECL 107 AS EASY	230\50\1	A	46	44	37	23	0,4	10	6	595	3 x 1,5	10