

EXS 107

Self Contained Ice Machine 50 kg

Scotsman®

Item
Project
Quantity

		FEATURES • Stainless steel finishing • Front access for easier maintenance. • Built-in storage bin: allows most undercounter installations for easier fit-in solutions. • Reduced dimensions • PWD - Progressive Water Discharge: pumps excess residual water up to a distance of 15 meters. • SELF SANITATION System XSafe® • Optimum ratio between ice production and bin capacity • Low power and water consumption • R290 refrigerant • Electronic control board		
 EXS Square Gourmet 25g Ø 30 mm - H 30 mm	CONDENSING SYSTEM air cooled			
	REFRIGERANT GAS R290			
	VOLTAGE V/HZ/PH 230\50\1			
CERTIFICATIONS    		OPERATING REQUIREMENTS		
			Minimum	Maximum
		Air temperature	10	43
		Water temperature	5	38
		Water pressure	1 bar (14 psi)	5 bar (70 psi)
		Electrical voltage	-10%	+10%
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.		www.scotsman-ice.it		

Self Contained Ice Machine 50 kg

October 2025


EXS 107

Self Contained Ice Machine 50 kg

Scotsman®

Item
Project
Quantity

Self Contained Ice Machine 50 kg

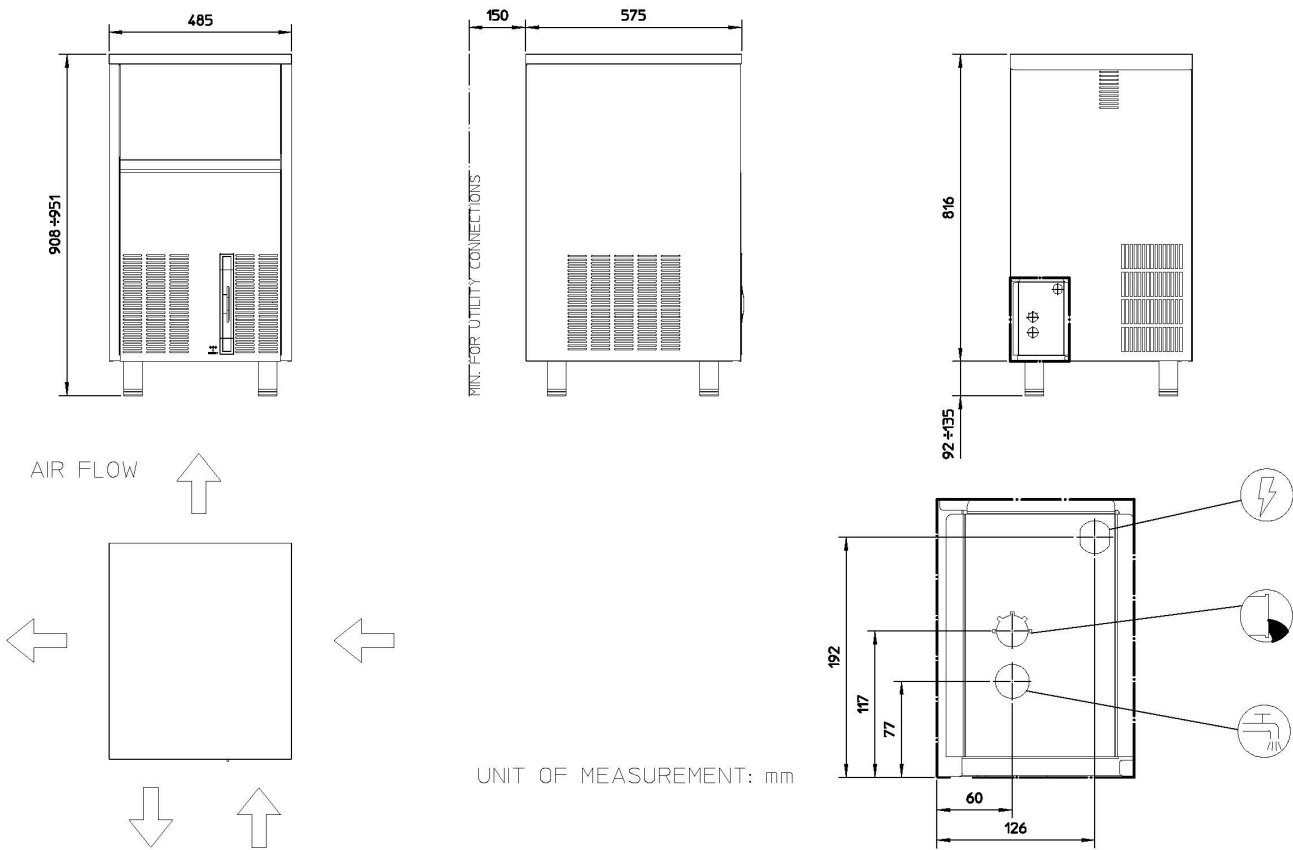

UNIT DATA			SHIPPING DATA			(*) Data refer to 32°C Amb. / 21°C Water temperature conditions						
Size (W x D x H)		485 x 575x 816 mm	Size (W x D x H)		550 x 640x 840mm							
Net weight		48 kg	Gross weight		59 kg							
			24 h ice production kg C Amb. / °C Water			Cap bin	Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kg	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg							
EXS 107 AS	230\50\1	A	50	47	40	18	0,9	8,6	4,7	460	3 x 1,0	10