

MXG 327

XSafe EcoX

Modular Ice Machine 152 kg

Item
Project
Quantity

					FEATURES - Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition. - Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference. - Electronic control board with self diagnostic and malfunction alarms. - External indicator lights: keeps ice maker's operations under constant surveillance. - Front access condenser air filter, removable and washable (air cooled version only). - Clean alert: advises with a blink when it's time to clean the filter. - XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.																																	
 MXG L Large Gourmet 39 g Ø 38 mm - H 41 mm  MXG M Medium Gourmet 20 g Ø 30 mm - H 34 mm  MXG S Small Gourmet 8 g Ø 21 mm - H 25 mm <table><tr><th>Model</th><th>Cube</th><th>Ø</th><th>H</th><th>Weight</th></tr><tr><td>MXG L</td><td>Large</td><td>38 mm</td><td>41 mm</td><td>39 g</td></tr><tr><td>MXG M</td><td>Medium</td><td>30 mm</td><td>34 mm</td><td>20 g</td></tr><tr><td>MXG S</td><td>Small</td><td>21 mm</td><td>25 mm</td><td>8 g</td></tr></table>					Model	Cube	Ø	H	Weight	MXG L	Large	38 mm	41 mm	39 g	MXG M	Medium	30 mm	34 mm	20 g	MXG S	Small	21 mm	25 mm	8 g	CONDENSING SYSTEM air cooled water cooled		RECOMMENDED BIN <table><tr><th>BIN</th><th>KG</th></tr><tr><td>SB193</td><td>129</td></tr></table>		BIN	KG	SB193	129	REFRIGERANT GAS R290		VOLTAGE V/HZ/PH 230\50\1			
Model	Cube	Ø	H	Weight																																		
MXG L	Large	38 mm	41 mm	39 g																																		
MXG M	Medium	30 mm	34 mm	20 g																																		
MXG S	Small	21 mm	25 mm	8 g																																		
BIN	KG																																					
SB193	129																																					
CERTIFICATIONS  					OPERATING REQUIREMENTS <table><tr><th></th><th>Minimum</th><th>Maximum</th></tr><tr><td>Air temperature</td><td>10</td><td>43</td></tr><tr><td>Water temperature</td><td>5</td><td>38</td></tr><tr><td>Water pressure</td><td>1 bar (14 psi)</td><td>5 bar (70 psi)</td></tr><tr><td>Electrical voltage</td><td>-10%</td><td>+10%</td></tr></table>						Minimum	Maximum	Air temperature	10	43	Water temperature	5	38	Water pressure	1 bar (14 psi)	5 bar (70 psi)	Electrical voltage	-10%	+10%														
	Minimum	Maximum																																				
Air temperature	10	43																																				
Water temperature	5	38																																				
Water pressure	1 bar (14 psi)	5 bar (70 psi)																																				
Electrical voltage	-10%	+10%																																				
IMPORTANT NOTICE Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.					www.scotsman-ice.it www.scotsman-ice.com																																	

Modular Ice Machine 152 kg

MXG 327 *XSafe EcoX*

Modular Ice Machine 152 kg


Scotsman®
Ice Systems

Item

Project

Quantity

Modular Ice Machine 152 kg

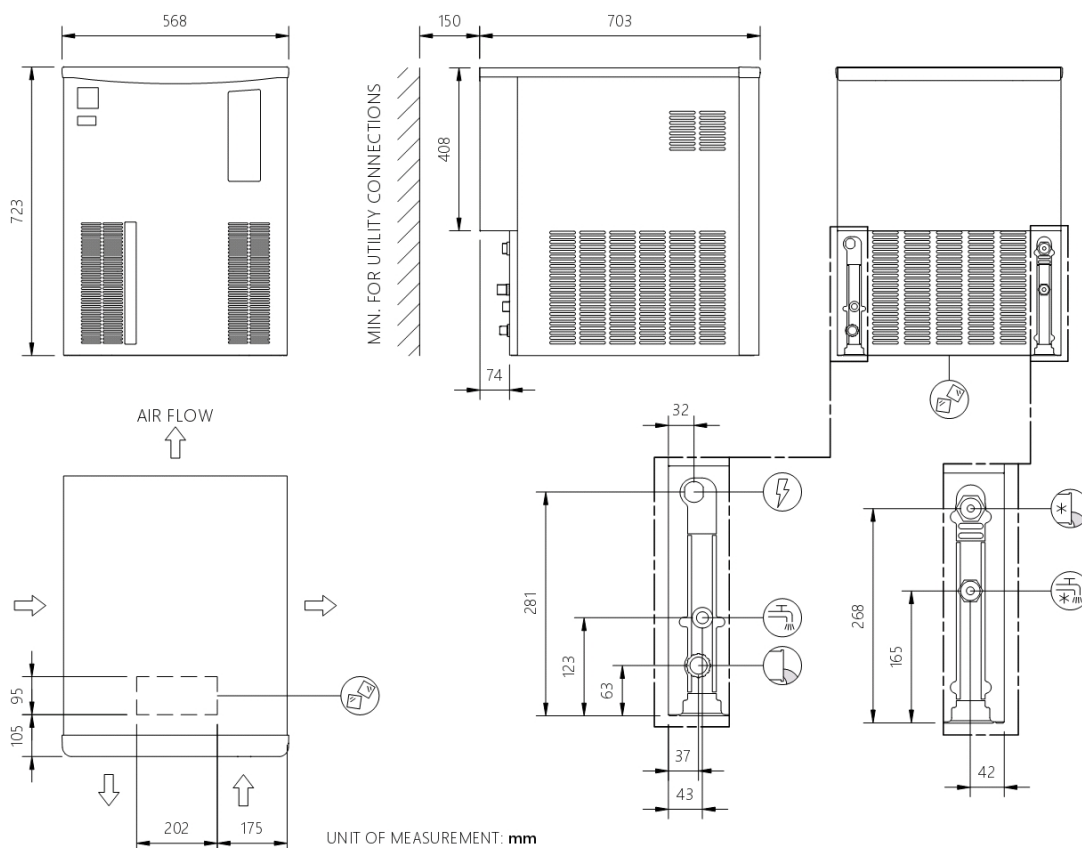

UNIT DATA

Size (W x D x H)
Net weight

568 x 704 x 721 mm
66 kg

SHIPPING DATA

Size (W x D x H)
Gross weight

630 x 770 x 910 mm
77 kg

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

			24 h ice production kg C Amb. / °C Water			Heat Rejection	Energy Consumption (*)	Water Usage (*)	instant power	circuit wires	Max. Fuse Size
Version	Voltage	Condensation	10°C/10°C	21°C/10°C	32°C/21°C	kW	kWh/24h	l/h	W	No. x Ømm2	A
			kg	kg	kg						
MXG M 327 AS	230\50\1	A	152	149	112	2,7	21	13	1.150	3 x 1,5	16
MXG S 327 AS	230\50\1	A	150	147	120	2,1	21	18	1.150	3 x 1,5	10
MXG L 327 AS	230\50\1	A	140	137	110	2,1	21	12	1.150	3 x 1,5	16
MXG M 327 WS	230\50\1	W	135	134	121	2,8	19	99	895	3 x 1,5	10

Milano

Madrid

Chicago

Dubai

Singapore

Shanghai

Johannesburg